




FB SERIES FUSE BLOCKS

FB-M03XPQ Pressure Plate with Quick Connect

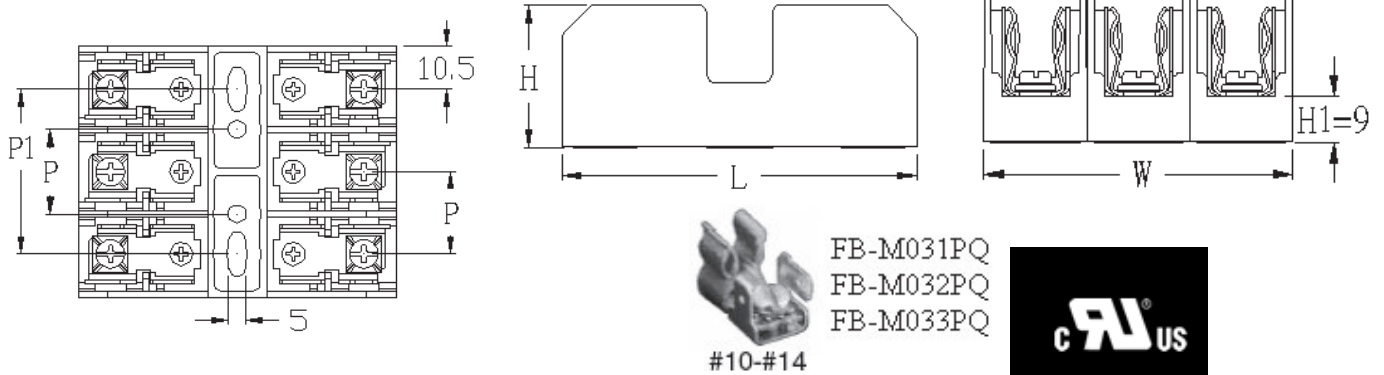

Item No.	FB-M031PQ	FB-M032PQ	FB-M033PQ
Dimensions			
Tolerance: +/- 0.015" (0.38mm)			
Length (L) [inch]	3.000" (76.2 mm)	3.000" (76.2 mm)	3.000" (76.2 mm)
Width (W) [inch]	0.827" (21.0 mm)	1.598" (40.6 mm)	2.370" (60.2 mm)
Height (H) [inch]	1.193" (30.3 mm)	1.193" (30.3 mm)	1.193" (30.3 mm)
Ref. Height (H1) [inch]	0.354" (9.0 mm)	0.354" (9.0 mm)	0.354" (9.0 mm)
Pitch (P) [inch]	0.772" (19.6 mm)	0.772" (19.6 mm)	0.772" (19.6 mm)
Mounting Position (P1) [inch]	N/A	0.772" (19.6 mm)	1.543" (39.2 mm)
Screws (C)	M5 (with pressure plate)	M5 (with pressure plate)	M5 (with pressure plate)
Electrical Specification			
Rated Voltage [V]	600 V	600 V	600 V
Rated Current [A]	30 A	30 A	30 A
Materials			
Insulating Body Materials	Thermoplastic	Thermoplastic	Thermoplastic
Color	Black	Black	Black
UL Flame Retarded Grade	UL 94V-0	UL 94V-0	UL 94V-0
Temperature [°C]	120 °C	120 °C	120 °C
Clips	Tin-plated Phosphor Bronze	Tin-plated Phosphor Bronze	Tin-plated Phosphor Bronze
Accessories & Parts			
Fuse specifications	13/32"x1 1/2" (10x38mm)	13/32"x1 1/2" (10x38mm)	13/32"x1 1/2" (10x38mm)
Indicators	FB-030-1/FB-030-2/FB-030-3	FB-030-1/FB-030-2/FB-030-3	FB-030-1/FB-030-2/FB-030-3
DIN Rail Adapter	DRA-1 / DRA-2 / DRA-3	DRA-1 / DRA-2 / DRA-3	DRA-1 / DRA-2 / DRA-3
End Clamp	TA-002 / TA-002H TE-002 / TF-ECL / TF-ECH	TA-002 / TA-002H TE-002 / TF-ECL / TF-ECH	TA-002 / TA-002H TE-002 / TF-ECL / TF-ECH
Approvals (Agency Information)	UL/cUL Approved E300304	UL/cUL Approved E300304	UL/cUL Approved E300304